


# How to modify LG installation for DualMode compatibility

Rails of lane changer entry section as viewed from the bottom.  
A Double has all 8 rails. A Left has no 5&6. A Right has no 7&8.

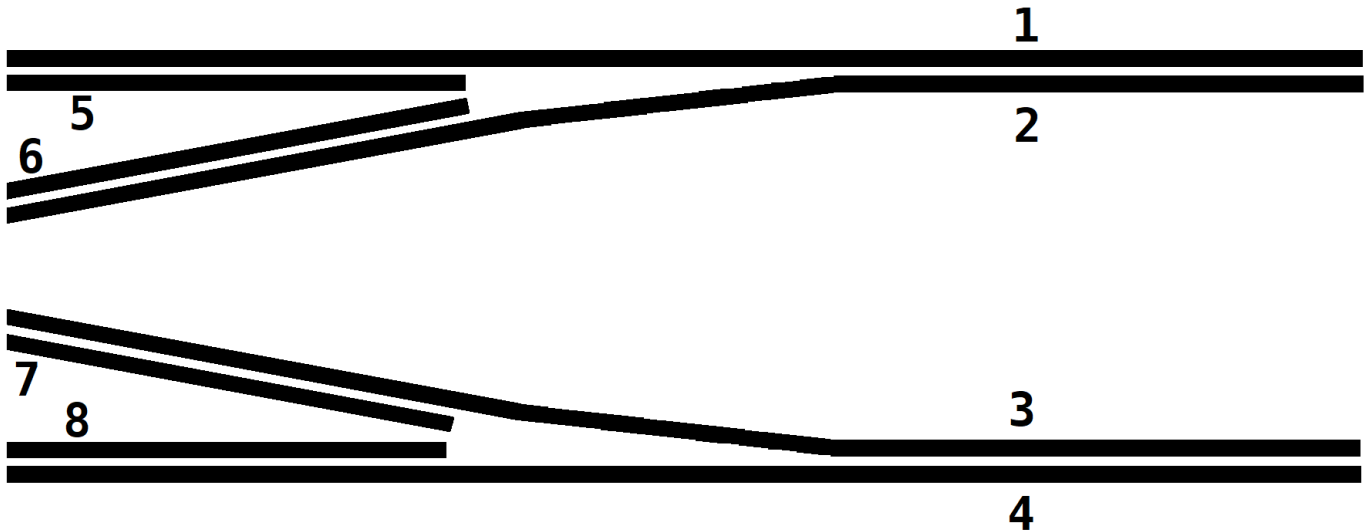

Disconnect LG wire from #1, move to #8.  
(does not apply to Right lane changers)

Disconnect LG wire from #4, move to #5.  
(does not apply to Left lane changers)

Stock LG harness will need wire(s)  
extended about 5cm (2") to reach.